

PRODUCT INFO



SPORT-ROLLER CITY


Lowrider or rear panniers (pair) with QL1 system



Carrying handle for mounting and releasing the QL1 system

Buckles for fixing the rolling closure

High-quality 3M Scotchlite reflector

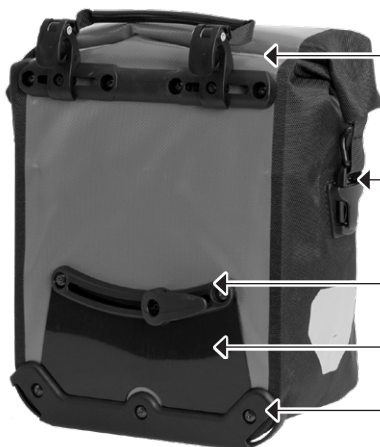

QL1 rail for fast fixing to the rack or lowrider

D-ring for shoulder strap (optional)

Semi-elliptical hook rail with QL hook (adjustable in 15° steps)

Abrasion protector

Edge protector with slots for mounting the Carrying System Bike Pannier

Height cm/in	Width cm/in	Depth cm/in	Volume L/cu.in.	Weight g/oz.
30/11.8	25/9.8	14/5.5	25/1526 (pair)	1210/42.7 (pair)

SPECIFICATIONS:

- + Waterproof bike pannier (pair) ideal as starter model
- + Can be used individually or as pair as small rear pannier or for the lowrider
- + Sides of PS490 nylon material, front and back of PD620
- + QL1 mounting system
- + For racks with a diameter up to 16 mm, reduction pieces for 8 mm and 11 mm rack diameters included
- + Top QL hooks and lower sliding hook adjustable with Allen key no. 3
- + Mounting not required; simply adjust QL hook distance with Allen key no.3
- + Symmetrical shape allows use on right or left side
- + Highly reflective 3M Scotchlite reflector
- + Ideal for use on children's/youth bicycles
- + Easy to clean inside

Contents: Panniers come as a pair

Optional accessories: ORTLIEB carrying system, inner pocket, outer pocket/s (size S), mesh pocket, bottle cage, shoulder strap (article code E 172)

Attention: Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

Note: In order to meet standard IP64 (6=dustproof 4=protected against splash water coming from all directions) the lid must be rolled 3-4 times.

