
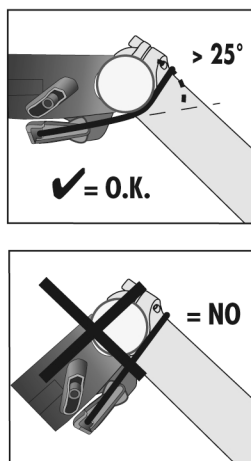


WATERPROOF

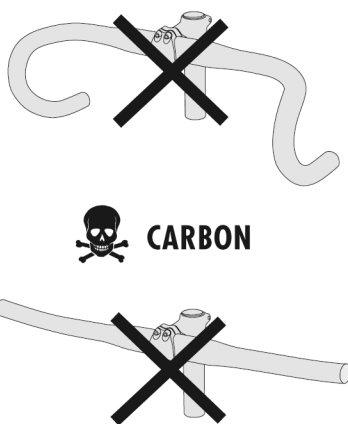

A line drawing showing a hand holding a patient's arm. The arm is extended, and a blood pressure cuff is being applied to the upper arm. The hand is positioned to hold the arm steady while the cuff is placed.



NOTE: Use of this product may cosmetically blemish the surface of the handlebar and stem. To minimize wear please remove any dirt or grit off of the contact points prior to fixing to bike.

A diagram of a mechanical device, possibly a connector or a switch, with two cables attached. The device has a central body with two main ports on the left and right. A light gray cable is connected to the left port, and a black cable is connected to the right port. Both cables have a loop at the bottom and a hook at the top. The hook on the black cable is attached to a small rectangular component at the top of the device.


Diagram illustrating correct cable connection. A black cable is connected to the top terminal of a terminal block, and a white cable is connected to the bottom terminal. A warning triangle with an exclamation mark is shown above the black cable, and a checkmark is shown next to the text "= O.K.".

2.1 - 2.11


2.1 – 2.11

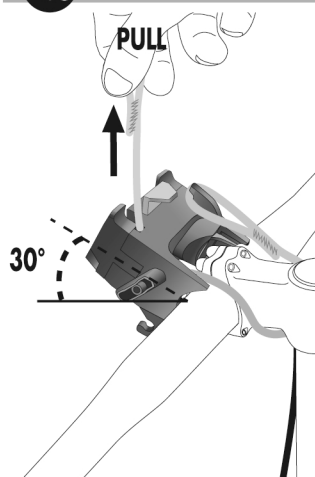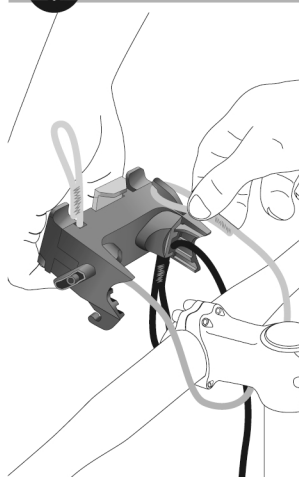


2.5 FIX BLACK CORD

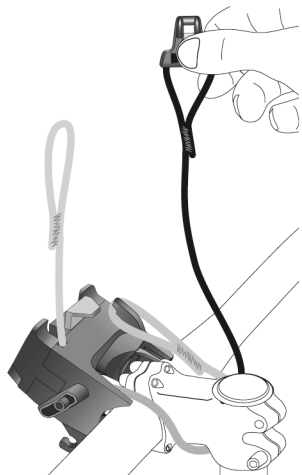


2.6 FIX BLACK CORD

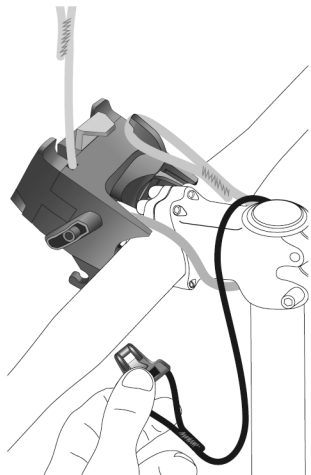


2.7 FIX BLACK CORD

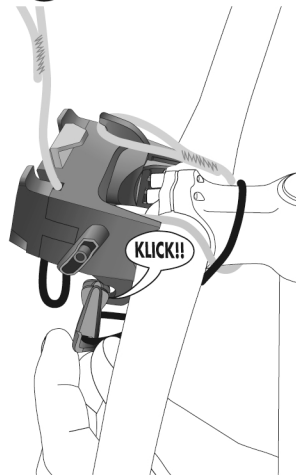


2.8 FIX BLACK CORD

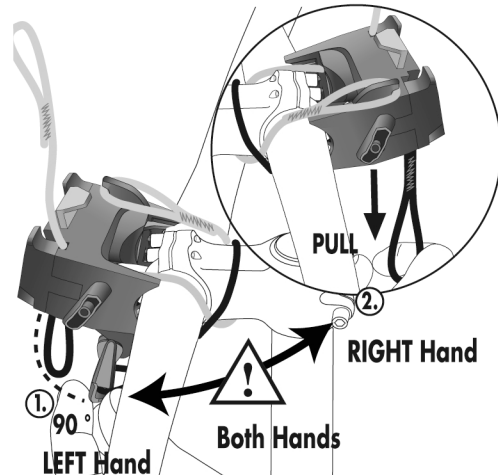


2.9 FIX BLACK CORD

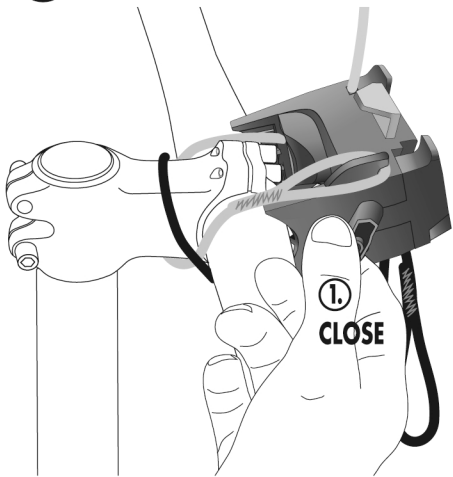


2.10 ATTACH BLACK CORD

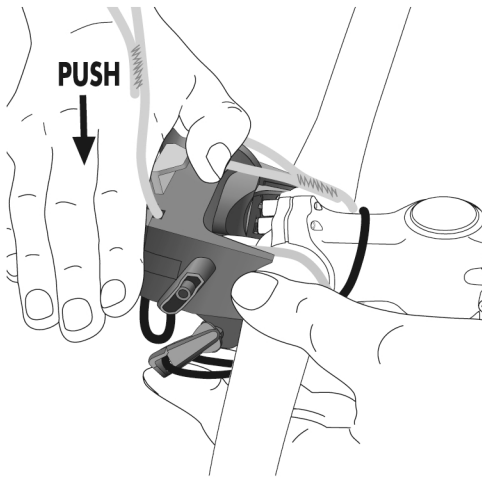


2.11 ✓ = O.K.

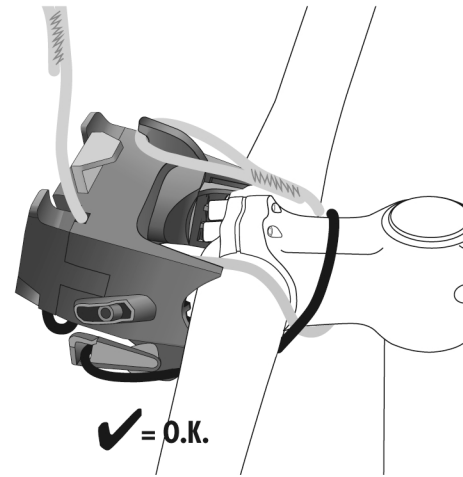


3.1 REMOVE

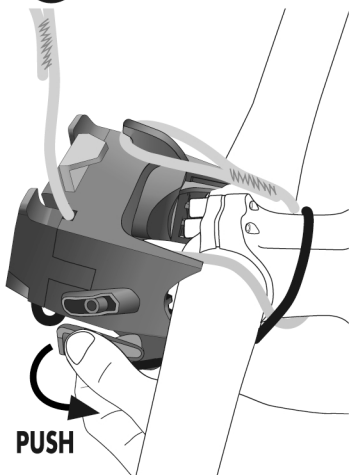

3.2 REMOVE

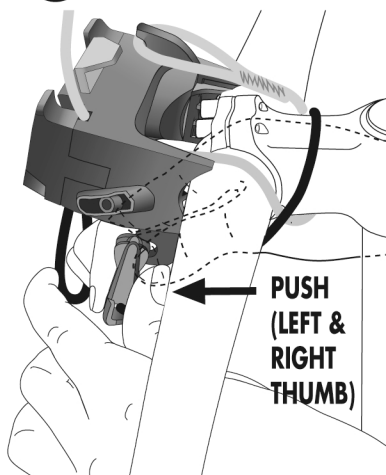

3.3 REMOVE

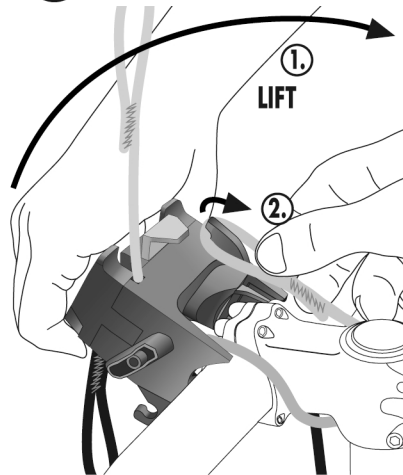



3.4

ADJUSTED GREY /
BLACK CORD



READY
FOR NEXT
INSTALLATION!



READJUST BLACK CORD

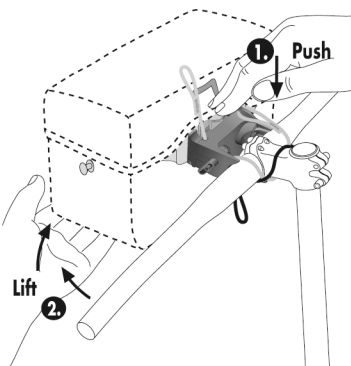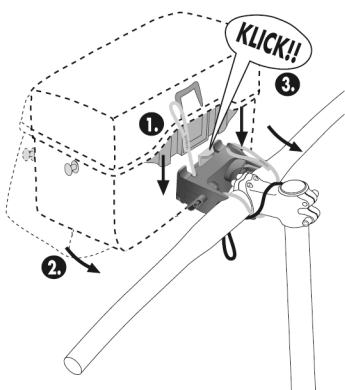

max. 5 kg



2.8 & 2.9

- 1.) 10 km (6 Miles)
- 2.) 50 km (30 Miles)
- 3.) 100 km (60 Miles)
- 4.) 200 km (120 Miles)
- etc.